



BULK MATERIALS HANDLING SOLUTIONS

MADE BETTER

K-Polymer Conveyor Roller

K-Polymer conveyor roller is the new generation heavy duty light weight, alternative to a steel shell roller. It offers the best solution to roller failure caused by corrosion in humid and wet conditions. Although the roller is light weight, approximately 50% that of steel, it is engineered using modern polymer and fibre (HDPE) materials to substantially out last steel. Comparative wear test prove this are available on request.

The light weight design means that risk of back injury is significantly reduced as manual handling is made easier, especially when carrying up steep inclines.

K-Polymer rollers are in most cases self cleaning by not allowing carry back to stick to the non porous shell, causing mistracking, potential spillage or belt wear.

Rollers are interchangeable with existing steel rollers by having the same diameters, bearing and shaft sizes.


K-Polymer rollers are installed in almost every type of belt conveying application. They are fast becoming the preferred option over conventional steel rollers.

Many users report the significant noise reduction compared to steel rollers and tests document the quiet operation.

Our standard stock range covers conventional interchangeable shaft Australian configurations but all made to order dimensions can be accommodated.

All components are recyclable. Any used rollers maybe returned to us for recycling. Refer to our recycle policy.

- 50% less weight than steel.
- Belt friendly.
- Quiet.
- Corrosion Resistant.
- Wear Resistant.
- UV Resistant.

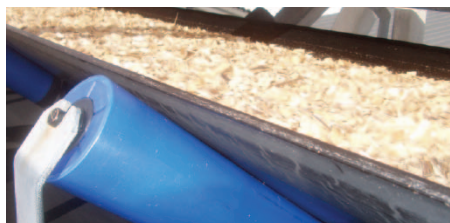

Kinder and Co. Pty. Ltd. Copyright © 2008 ABN 28 006 489 238

+61 (3) 9587 9244 +61 (3) 9587 9344 sales@kinder.com.au www.kinder.com.au



BULK MATERIALS HANDLING SOLUTIONS

MADE BETTER

K-Polymer Conveyor Roller

Shell Diameter	Shaft Diameter at Bearing	Bearing Series
89mm	17mm	6203
89mm	20mm	6204
102mm	20mm	6204
102mm	25mm	6205
108mm	20mm	6204
108mm	25mm	6205
114mm	20mm	6204
114mm	25mm	6205
127mm	20mm	6204
127mm	25mm	6205 or 6305
127mm	30mm	6206
133mm	20mm	6204
133mm	25mm	6205 or 6305
133mm	30mm	6206
140mm	25mm	6205 or 6305
140mm	30mm	6206
152mm	25mm	6305
152mm	30mm	6206 or 6306
152mm	35mm	6207
159mm	30mm	6306
159mm	35mm	6207
159mm	40mm	6308

Belt Range : 400 to 2400mm

Roller Diameters : 89 mm, 102 mm, 114 mm, 127 mm, 152mm, 159 mm (*other sizes available on request*)

Shafting : C1045 precision ground.

Seals : Nylon Triple Labyrinth with rubber outer weather seal.

Bearing Type : NTN Brand, ZZ Series, (*other brands available on request*)

Test Results : Rim Drag, TIR and Dynamic Unbalance Measurements are available on request.

Kinder and Co. Pty. Ltd. Copyright © 2008 ABN 28 006 489 238

+61 (3) 9587 9244 +61 (3) 9587 9344 sales@kinder.com.au www.kinder.com.au